




The MiniJet™ is designed for blowing or floating telecommunication cables (optical fibre, coax or multipair) or micro-ducts in preinstalled ducts.

Standard equipment:

- 1 box for the MiniJet
- 1 box for tools, inserts, wear parts and consumables (seals, lubricant, etc.)
- 1 set of tools
- 1 speed and distance indicator
- 1 air hose with quick release coupling
- 1 body to connect to compressor
- 2 belt V (Poly-V)
- 1 bottle of lubricant Jetting Lube
- 1 bottle of lubricant Micro Jetting Lube
- 1 operation and maintenance manual

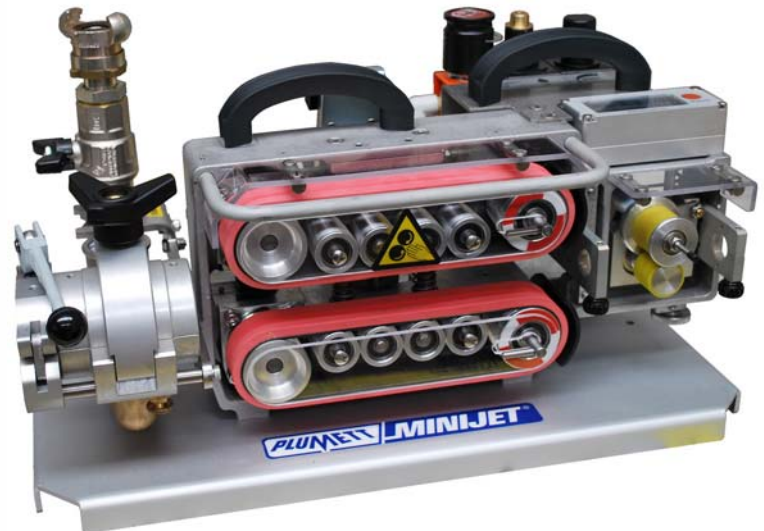

Standard version	MiniJet with pneumatic drive	MiniJet with hydraulic drive
Type	P02	H02
Cable dia. [mm]	4-16	4-16
Duct OD [mm]	7-42	7-42
Drive unit	Pneumatic	Hydraulic
Max. air consumption of motor [m3/min]	0.5 (at 4 bar)	-
Pushing force [N]	0-300	0-500
Linear pressure on cable [N/cm]	100	100
Max. speed [m/min]	100	125
Recommended speed [m/min]	40	40
Hydraulic power pack, type of engine	-	Honda Gasoline GX200
Hydraulic power pack, engine, max. power [kW]	-	4.1
Hydraulic power pack, engine, max. speed rpm [min-1]	-	3600
Hydraulic power pack, pump, delivery rating [l/min]	-	17
Hydraulic power pack, pump, hydraulic pressure [bar]	-	70
Max. air pressure [bar]	16	16
Max. water pressure [bar]	25	25
Dimension of apparatus l x w x h [mm]	520 x 372 x 293	518 x 372 x 298
Dimension of apparatus with case l x w x h [mm]	600 x 400 x 340	600 x 400 x 340
Dimension of tools and accessories case l x w x h [mm]	600 x 400 x 135	600 x 400 x 135
Weight of machine [kg]	20	20.5
Total weight [kg]	37	105

Specifications are subject to change without notice

PLUMETT / MINIJET™

MAIN ACCESSORIES



Hydrocab-010,
accessory for cable installation in
micro-ducts with water (floating),
10 l/min



Hydrocab-080,
accessory for cable installation with
water (floating), 80 l/min



Air after-cooler,
to increase Jetting performances when
ambient temperature is over 20°C



Jetting Lube / Micro Jetting Lube,
lubricant improving Jetting performance



Sonic head,
for the installation of cables
with low stiffness



Multi-duct accessories,
for the installation of microduct bundles



Lubricator L18,
for the continuous lubrication of cables
for a better Jetting performance



Figaro / Figarino,
intermediate cable storage system,
avoiding figure of 8



Y-connector,
for the installation of cable into an occupied
duct