



The CableJet™ is designed for blowing or floating telecommunication cables (optical fibre, coax or multipair) in preinstalled ducts.



**Standard equipment:**

- 1 box for the CableJet
- 1 box for tools, inserts, wear parts and consumables (seals, lubricant, etc.)
- 1 set of tools
- 1 speed and distance indicator
- 1 air hose 1½" (10 m) and stop valve to connect to compressor
- 2 bottles of lubricant Jetting Lube
- 1 operation and maintenance manual

Standard version	Cablejet
Type	P01
Cable dia. [mm]	9-18
Duct OD [mm]	20-63
Drive unit	Pneumatic
Max. air consumption of motor [m3/min]	0.5 (at 4 bar)
Pushing force [N]	0-300
Linear pressure on cable [N/cm]	100
Max. speed [m/min]	80
Recommended speed [m/min]	40
Max. air pressure [bar]	12
Max. water pressure [bar]	25
Dimension of apparatus l x w x h [mm]	520 x 320 x 230
Dimension of apparatus with case l x w x h [mm]	550 x 350 x 400
Dimension of tools and accessories case l x w x h [mm]	550 x 350 x 250
Weight of machine [kg]	21
Total weight [kg]	47

Specifications are subject to change without notice

## PLUMETT / CABLEJET™

### MAIN ACCESSORIES




**Hydrocab-080,**  
accessory for cable installation with  
water (floating), 80 l/min



**Air after-cooler,**  
to increase Jetting performances when  
ambient temperature is over 20°C



**Jetting Lube,**  
lubricant improving Jetting performance

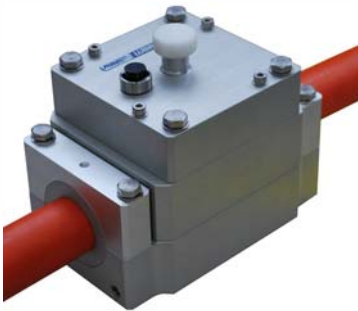

**Lubricator L18,**  
for the continuous lubrication of cables  
for a better Jetting performance



**Figaro,**  
intermediate cable storage system,  
avoiding figure of 8



**Y-connector,**  
for the installation of cable into an occupied  
duct



**Sonic head,**  
for the installation of cables  
with low stiffness